

# DM360™ SPECS




	DM360	DM360 <sub>x</sub>
<b>CABIN</b>		
Cabin Homologation	ROPS/FOPS Level 2 Certified	
Steering	Wheel/Joystick Steering	
Steer Modes	Crab, All Wheel Steer, Two Wheel Steer	
Seat	Air Suspension/Heated	
Polycarbonate	1/2" Front and Right Side	
Lighting	Amber Beacon / 6 LED Work Lights	
Display	7" Display	
Camera	Rear	
<b>PERFORMANCE</b>		
<b>UPPER HYDRAULICS</b>		
Attachment Flow	31 GPM @ 3050 psi	
Auxiliary 1 (adjustable)	1 - 15 GPM @ 3050 psi	
Auxiliary 2 (adjustable)	1 - 15 GPM @ 3050 psi	
<b>LOWER HYDRAULICS</b>	NA	41 GPM @ 4060 psi
Single Acting Service	NA	1
Dual Acting Service	NA	1
Trailer Electrics	NA	1
14-pin Electrics	NA	1
<b>ADDITIONAL SPECS</b>		
Maximum Travel Width	99"***	
Lift Arm with Quick Attach	NO	YES
Engine	JCB EcoMAX 4.4L (109 HP)	
Fuel Capacity	45.5 Gallons	
Axles	Limited Slip Front / Rear	
Max Travel Speed	25 MPH	
Gross Vehicle Weight (lbs)	24,380*	25,790*
LiveLink Telematics	Standard	
Standard Tires	Bar	

\* Attachment weight not included

\*\* With 60" rotary


**CONFIDENTIAL**

### CAB AT 0°

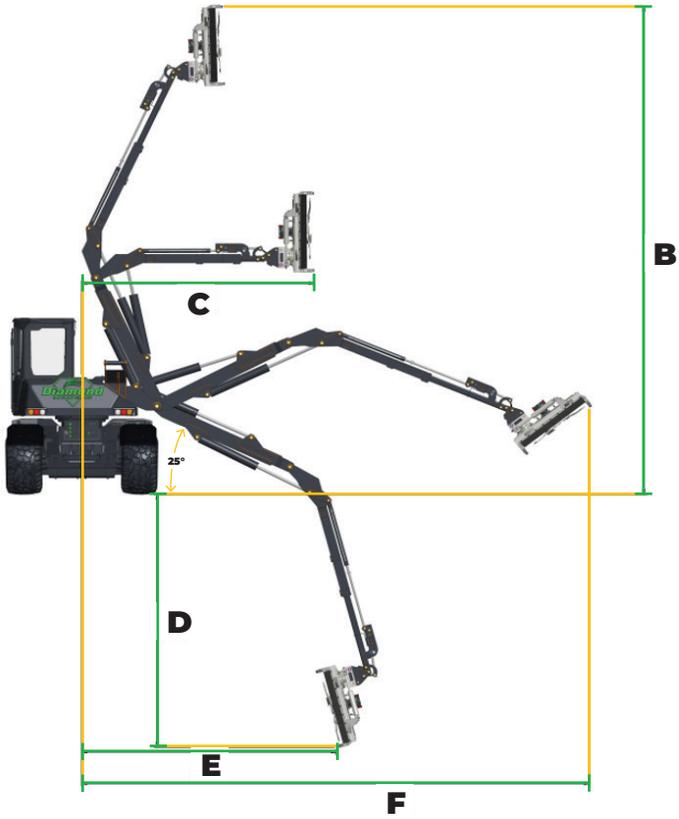

Boom Size	Dimensions				
	B	C	D	E	F
25'	22' 2"	10'	8' 8"	12' 5"	22' 2"
30'	27' 8"	12' 6"	14' 4"	13' 8"	27' 6"

### CAB AT 90°

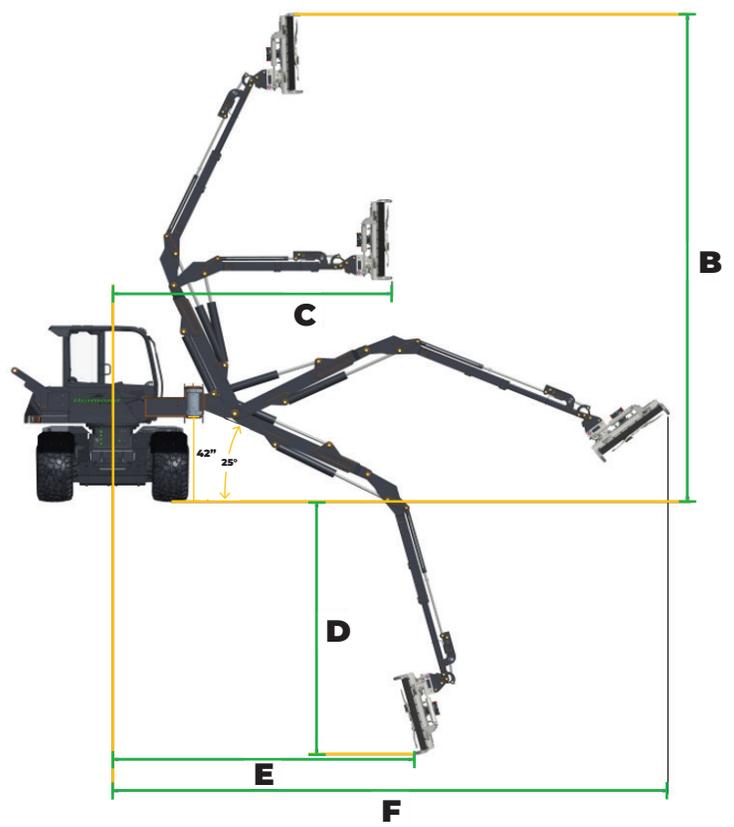

Boom Size	Dimensions				
	B	C	D	E	F
25'	22' 2"	12' 6"	8' 8"	14' 11"	25'
30'	27' 8"	15'	14' 4"	16' 2"	30'

### TRANSPORT



Boom Size	Dimensions
	A
25'	6' 4"
30'	4' 2"

SPEC-DM360  
R1-V7-12/3/2025

**CONFIDENTIAL**